

PROUDLY
MAKING
IN INDIA
SINCE
1968



KEI[®]

Wires & Cables

ab

CREATE TO CONNECT



**SAFETY AND
QUALITY, OUR
PRIORITY.**

LIST PRICE

CMD'S MESSAGE



MR. ANIL GUPTA

Chairman & Managing Director
KEI Industries Limited

KEI Industries, an Indian MNC founded in 1968, is a global leader in wire and cable solutions having an extensive range of world-class products and services. With multiple robust and cutting edge manufacturing facilities and a vast network of more than 30,000 channel partners, KEI serves clients in 65+ countries, establishing itself as a one-stop-shop for comprehensive wire and cable solutions. The company achieved a turnover of INR 8000+ crore in the fiscal year 2023-24.

As the world faces the pressing challenges of global warming and climate change, KEI Industries is dedicated to leading the way towards a sustainable and a carbon-neutral future. Our dedication involves using clean gas and solar energy, alongside advanced air and water treatment systems, to eliminate hazardous chemicals and ensure a safe, sustainable environment. Our diverse array of products also reflects our strong commitment towards building an eco-friendly efficient surrounding. With an ongoing focus on innovation, KEI is positioned to lead in sustainability while meeting the demands of global consumers through using cutting-edge technologies, driving progress and setting new standards for environmental responsibility.

STATE OF THE ART MANUFACTURING 5 UNITS



BHIWADI
RAJASTHAN



CHOPANKI
RAJASTHAN



PATHREDI
RAJASTHAN



RAKHOLI
DADRA AND NAGAR
HAVELI



CHINCHPADA
DADRA AND NAGAR
HAVELI

BUILDING THE NATION...! PRESTIGIOUS PROJECTS WIRED BY KEI



RAM MANDIR



**WORLD'S TALLEST
STATUE OF UNITY**



**WORLD'S
LARGEST NARENDRA
MODI STADIUM**



**PARLIAMENT OF
INDIA**



**KONKAN RAILWAY
PROJECT**



**INDIA'S LONGEST
BOGIBEEL BRIDGE**



BULLET TRAIN



**INDIAN INSTITUTE
OF TECHNOLOGY
BOMBAY**



**AIROLI-KATAI
NAKA TUNNEL**



**MUMBAI COASTAL
ROAD MEGA PROJECT**



MUMBAI MONORAIL




**MUMBAI NAGPUR
SAMRUDDHI HIGHWAY**

01	Conflame Green+ 90m	01
02	Conflame Green+ 180m	02
03	Homecab 90m	03
04	Banfire 90m	04
05	Banfire 200 & 300m	05
06	Conflame 200 & 300m	06
07	Homecab 200 & 300m	07
08	Communication Cables	08-09
09	Solar & Flat Cable	10-11
10	Flexible Cable	12-16

Terms and Conditions:-

- 1. GST and any other tax/levy will be charged extra, at actuals. Freight as per Policy.**
- 2. As per international practice which is also adopted by Bureau of Indian Standards, the diameter of the conductor shown above is The size of the conductor is determined by its resistance. The construction of the conductor is as per market convention and should be treated as a guideline only. It may vary within the limits of IS 8130:1994 with its related classes and tables.**
- 3. Standard colours in Building wires are RED / BLACK / BLUE / YELLOW / GREEN for other Colours or Lengths please contact our Marketing Department.**
- 4. FR / FRLSH & HFFR (ZHFR) wires are supplied in standard lengths of 90M Coils packed in Master Cartons.**
- 5. Please refer to our Marketing Department for Wires & Cables, not covered above.**
- 6. This Price List is subject to change without prior notice.**

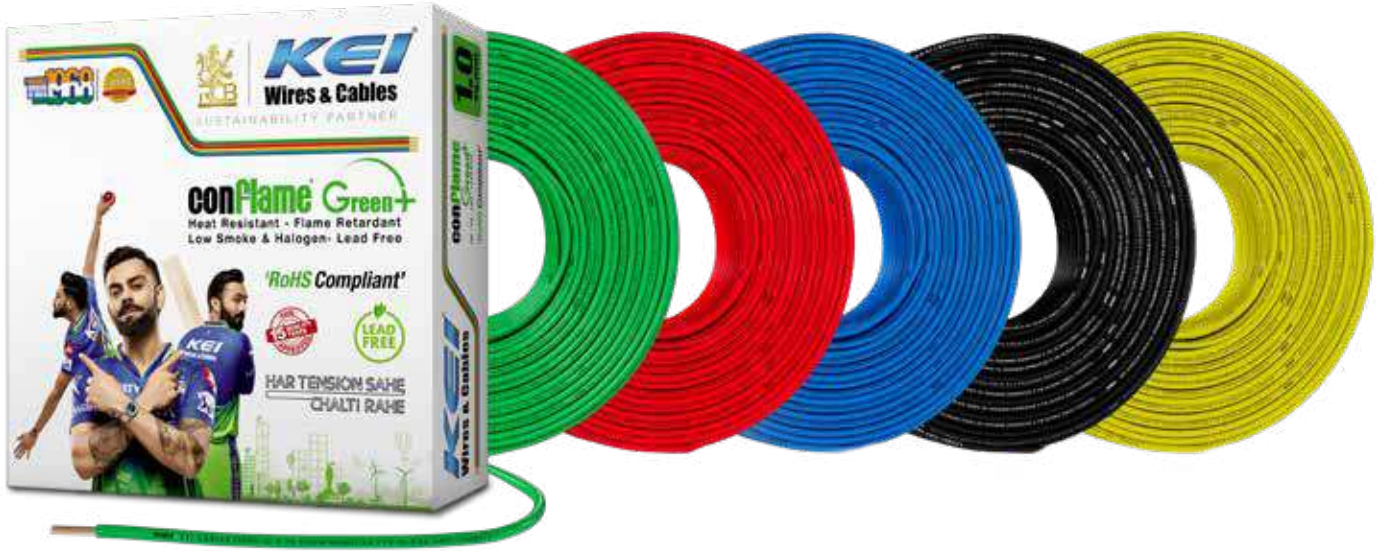

KEI Conflame GREEN+ WIRE (HL) - PVC INSULATED INDUSTRIAL SINGLE CORE UNSHEATHED INDUSTRIAL MULTISTRAND CABLES WITH HEAT RESISTANT FLAME RETARDANT LOW SMOKE (FRLSH) - LEAD FREE PROPERTIES, WITH FLEXIBLE BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-694:2010.

CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	Casing(In Conduit / Trunking)	90 MTR.		
				Unenclosed Clipped Directly to surface or on cable tray	STANDARD PACKING	RATE PER COIL
0.50	16/0.20	1C0.5HL90	5	5	28	1220
0.75	24/0.20	1C0.75HL90	9	10	28	1620
1.00	32/0.20	1C1HL90	14	16	24	2080
1.50	30/0.25	1C1.5HL90	17	21	16	3080
2.50	50/0.25	1C2.5HL90	23	28	12	4960
4.00	56/0.30	1C4HL90	31	38	8	7340
6.00	84/0.30	1C6HL90	40	48	6	11120
10.00	80/0.40	1C10HL90	54	66	1	19800
16.00	126/0.40	1C16HL90	74	88	1	30860

HSN CODE : 85.44.60.20

Colour available: Green | Red | Blue | Black | Yellow

conFlame Green+
Heat Resistant - Flame Retardant
Low Smoke & Halogen- Lead Free



Test	Specification	Specified Values
Critical Oxygen Index	ASTM-D 2863	Minimum 31%
Temperature Index	ASTM-D 2863	Minimum 250 °C
Acid Gas Generation	IEC 60754-1	Maximum 20%
Smoke Density Rating	ASTM-D 2843	Maximum 60%

IS : 694
CM/L-7380172

IS : 694
CM/L-7800072614

ISO 9001:2015
ISO 14001:2015
ISO 45001:2018

RoHS compliant


Cu International Copper Association India Copper Alliance

REACH COMPLIANT

CE ERDA

CPRI APPROVED

NABL ISO 9001:2015 Accredited

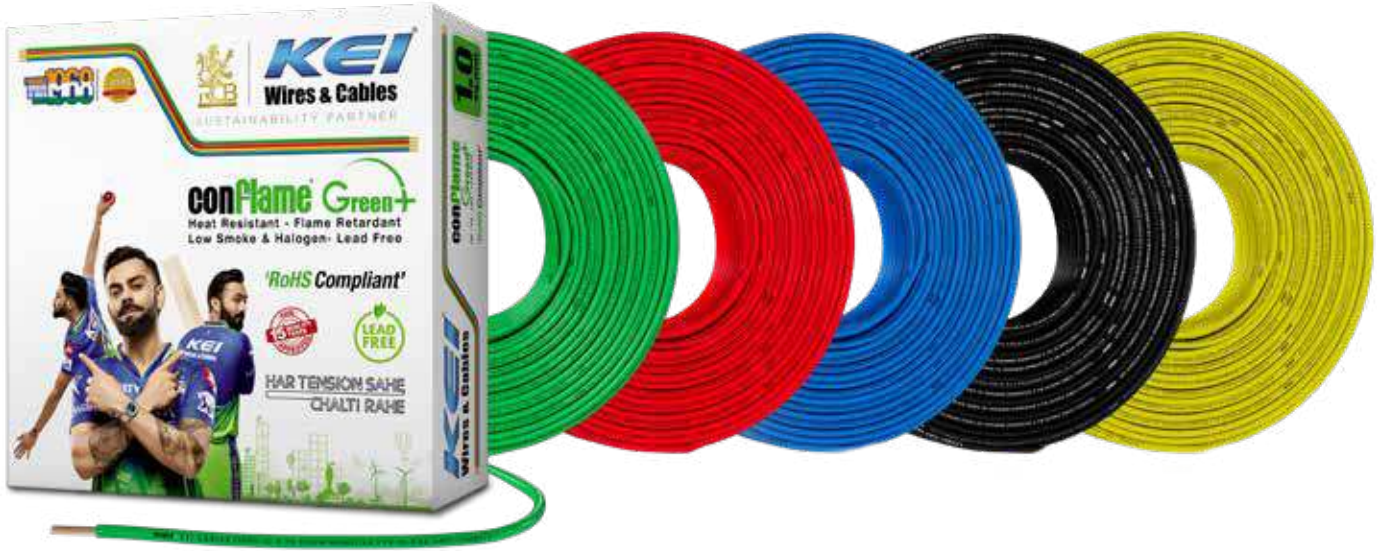

KEI Conflame GREEN+ WIRE (HL) - PVC INSULATED INDUSTRIAL SINGLE CORE UNSHEATHED INDUSTRIAL MULTISTRAND CABLES WITH HEAT RESISTANT FLAME RETARDANT LOW SMOKE (FRLSH) - LEAD FREE PROPERTIES, WITH FLEXIBLE BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-694:2010.

				180 MTR.		
CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	Casing(In Conduit / Trunking)	Unenclosed Clipped Directly to surface or on cable tray	STANDARD PACKING	RATE PER COIL
0.75	24/0.20	1C0.75HL180	9	10	12	3140
1.00	32/0.20	1C1HL180	14	16	12	4050
1.50	30/0.25	1C1.5HL180	17	21	8	6030
2.50	50/0.25	1C2.5HL180	23	28	6	9670
4.00	56/0.30	1C4HL180	31	38	4	14340
6.00	84/0.30	1C6HL180	40	48	3	21710

HSN CODE : 85.44.60.20

Colour available: Green | Red | Blue | Black | Yellow

conFlame Green+
Heat Resistant - Flame Retardant
Low Smoke & Halogen- Lead Free



Test	Specification	Specified Values
Critical Oxygen Index	ASTM-D 2863	Minimum 31%
Temperature Index	ASTM-D 2863	Minimum 250 °C
Acid Gas Generation	IEC 60754-1	Maximum 20%
Smoke Density Rating	ASTM-D 2843	Maximum 60%

IS : 694
CM/L-7380172

IS : 694
CM/L-7800072614

ISO 9001:2015
ISO 14001:2015
ISO 45001:2018

RoHS compliant

Cu International Copper Association India Copper Alliance

REACH COMPLIANT

CE ERDA

CPRI APPROVED

NABL ISO 9001:2015 Accredited



KEI HOMECAB - FR PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL MULTISTRAND CABLES - FLAME RETARDANT (FR) WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-694:2010.

				90 MTR.		
CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	Casing(In Conduit / Trunking)	Unenclosed Clipped Directly to surface or on cable tray	STANDARD PACKING	RATE PER COIL
0.50	16/0.20	1C0.5F90	4	4	28	1140
0.75	24/0.20	1C0.75F90	7	8	28	1530
1.00	32/0.20	1C1F90	12	13	24	1980
1.50	30/0.25	1C1.5F90	14	17	16	2930
2.50	50/0.25	1C2.5F90	19	23	12	4720
4.00	56/0.30	1C4F90	25	31	8	6990
6.00	84/0.30	1C6F90	33	39	6	10600
10.00	80/0.40	1C10F90	45	54	1	18880
16.00	126/0.40	1C16F90	60	72	1	29390

HSN CODE : 85.44.60.20

Colour available: Green | Red | Blue | Black | Yellow

homecab-FRTM

Flame Retardant



Test	Specification	Specified Values
Critical Oxygen Index	ASTM-D 2863	Minimum 29%
Temperature Index	ASTM-D 2863	Minimum 250 °C



KEI BANFIRE - SINGLE CORE, UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - ZERO HALOGEN FLAME RETARDANT (ZHFR)/ HALOGEN FREE FLAME RETARDANT (HFFR) WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-17048

				90 MTR.		
CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	Casing(In Conduit / Trunking)	Unenclosed Clipped Directly to surface or on cable tray	STANDARD PACKING	RATE PER COIL
0.75	24/0.20	1C0.75Z90	7	8	28	1630
1.00	32/0.20	1C1Z90	12	13	24	2150
1.50	30/0.25	1C1.5Z90	14	17	16	3160
2.50	50/0.25	1C2.5Z90	19	23	12	5050
4.00	56/0.30	1C4Z90	25	31	8	7440
6.00	84/0.30	1C6Z90	33	39	6	11220
10.00	80/0.40	1C10Z90	45	54	1	20210
16.00	126/0.40	1C16Z90	60	72	1	31430

HSN CODE : 85.44.60.20

Colour available: Green | Red | Blue | Black | Yellow

banFire® - HFFR
Halogen Free-Flame Retardant



Test	Specification	Specified Values
Critical Oxygen Index	ASTM-D 2863	Minimum 29%
Temperature Index	ASTM-D 2863	Minimum 250 °C
Acid Gas Generation	IEC 60754-1	Maximum 0.5%
Smoke Density Rating	ASTM-D 2843	Maximum 20%

IS : 694
CM/L-7380172

IS : 694
CM/L-7800072614

ISO 9001:2015
ISO 14001:2015
ISO 45001:2018

RoHS compliant


Cu International Copper Association India Copper Alliance

REACH COMPLIANT

CE ERDA

CPRI APPROVED

NABL ISO 9001:2015 Accredited

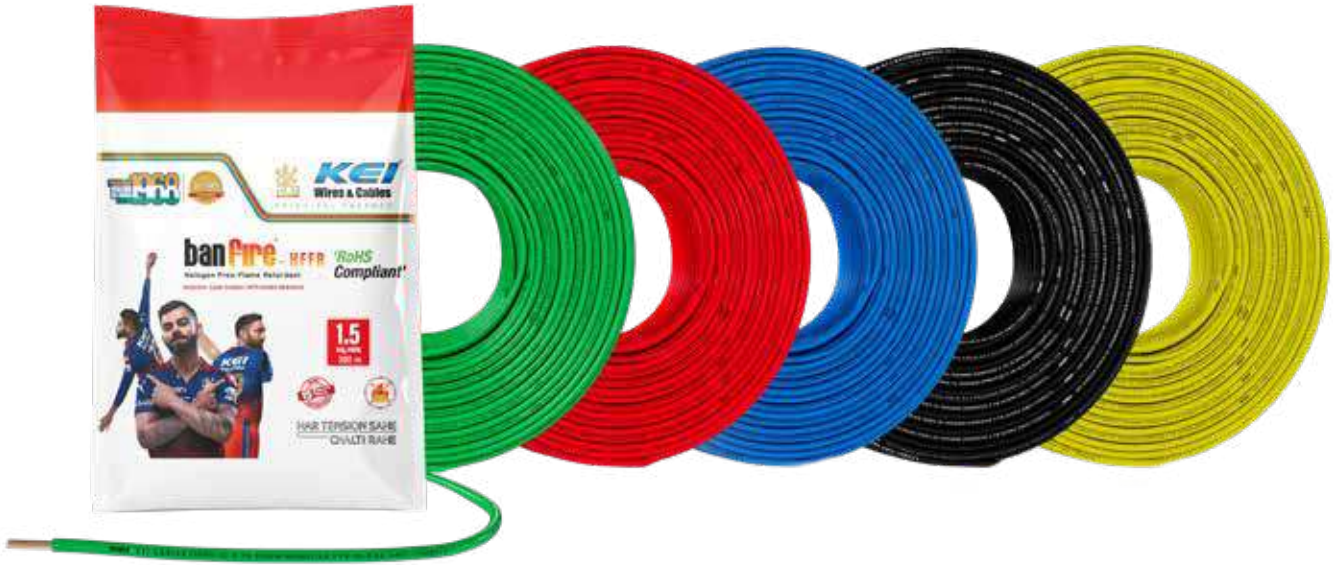

KEI BANFIRE - SINGLE CORE, UNSHEATHED INDUSTRIAL (MULTISTRAND) CABLES - ZERO HALOGEN FLAME RETARDANT (ZHFR)/ HALOGEN FREE FLAME RETARDANT (HFFR) WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-17048

300 MTR.

CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	CURRENT (AMPS) BUNCHED & ENCLOSED IN CONDUIT OR TRUNKING	STANDARD PACKING	RATE PER COIL
0.75	24/0.20	1C0.75Z300	7	8	5430
1.00	32/0.20	1C1Z300	11	8	7130
1.50	30/0.25	1C1.5Z300	14	6	10600
2.50	50/0.25	1C2.5Z300	19	4	17120

200 MTR.

CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	CURRENT (AMPS) BUNCHED & ENCLOSED IN CONDUIT OR TRUNKING	STANDARD PACKING	RATE PER COIL
4.00	56/0.30	1C4Z200	26	4	16810
6.00	84/0.30	1C6Z200	31	3	25520

HSN CODE : 85.44.60.20

Colour available: Green | Red | Blue | Black | Yellow

banFire® - HFFR

Halogen Free-Flame Retardant



Test	Specification	Specified Values
Critical Oxygen Index	ASTM-D 2863	Minimum 29%
Temperature Index	ASTM-D 2863	Minimum 250 °C
Acid Gas Generation	IEC 60754-1	Maximum 0.5%
Smoke Density Rating	ASTM-D 2843	Maximum 20%

IS : 694

 CML/L-7380172 CML/L-7800072614

ISO 9001:2015

 ISO 14001:2015

 ISO 45001:2018

RoHS compliant


International Copper Association India
 Copper Alliance

REACH COMPLIANT

CE
 ERDA

CPRI APPROVED

NABL ISO 9001:2015 Accredited

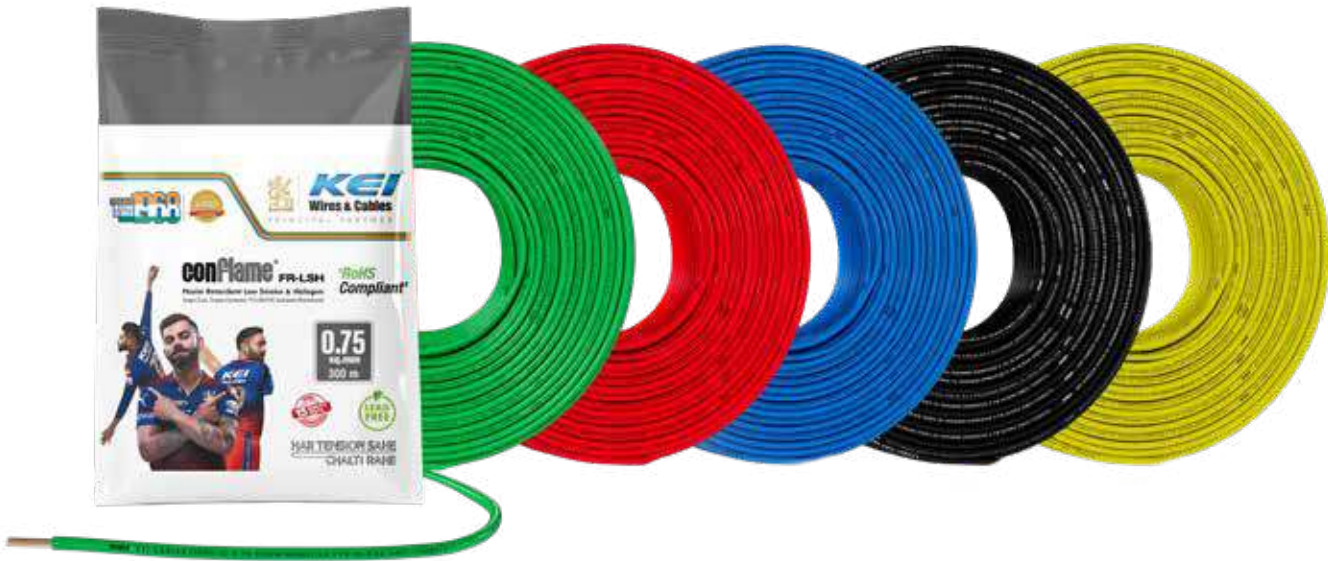

KEI PVC INSULATED INDUSTRIAL SINGLE CORE UNSHEATHED INDUSTRIAL MULTISTRAND CABLES WITH FRLSH PROPERTIES, WITH FLEXIBLE BRIGHT ANNEALED BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-694:2010 / IS 17048.

300 MTR.					
CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	CURRENT (AMPS) BUNCHED & ENCLOSED IN CONDUIT OR TRUNKING	STANDARD PACKING	RATE PER COIL
0.50	16/0.20	1C0.5L300	4	12	3840
0.75	24/0.20	1C0.75L300	7	8	5330
1.00	32/0.20	1C1L300	11	8	6980
1.50	30/0.25	1C1.5L300	14	6	10430
2.50	50/0.25	1C2.5L300	19	4	16880

200 MTR.					
CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	CURRENT (AMPS) BUNCHED & ENCLOSED IN CONDUIT OR TRUNKING	STANDARD PACKING	RATE PER COIL
4.00	56/0.30	1C4L200	26	4	16610
6.00	84/0.30	1C6L200	31	3	25300

HSN CODE : 85.44.60.20

Colour available: Green | Red | Blue | Black | Yellow

conFlame® - FR-LSH

Flame Retardant Low Smoke & Halogen

Test	Specification	Specified Values
Critical Oxygen Index	ASTM-D 2863	Minimum 29%
Temperature Index	ASTM-D 2863	Minimum 250 °C
Acid Gas Generation	IEC 60754-1	Maximum 20%
Smoke Density Rating	ASTM-D 2843	Maximum 60%



IS : 694
CM/L-7380172

IS : 694
CM/L-7800072614

ISO 9001:2015
ISO 14001:2015
ISO 45001:2018

RoHS compliant

Cu International Copper Association India Copper Alliance

REACH COMPLIANT

CE ERDA

CPRI APPROVED

NABL ISO 9001:2015 Accredited



KEI PVC INSULATED INDUSTRIAL SINGLE CORE UNSHEATHED INDUSTRIAL MULTISTRAND CABLES WITH FR PROPERTIES, WITH FLEXIBLE BRIGHT ANNEALED BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-694:2010 / IS 17048.

300 MTR.

CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	CURRENT (AMPS) BUNCHED & ENCLOSED IN CONDUIT OR TRUNKING	STANDARD PACKING	RATE PER COIL
0.50	16/0.20	1C0.5F300	4	12	3590
0.75	24/0.20	1C0.75F300	7	8	4970
1.00	32/0.20	1C1F300	11	8	6540
1.50	30/0.25	1C1.5F300	14	6	9900
2.50	50/0.25	1C2.5F300	19	4	16080

200 MTR.

CONDUCTOR (AREA SQ.MM)	NO. & SIZE OF WIRE IN MM	ERP ITEM CODE	CURRENT (AMPS) BUNCHED & ENCLOSED IN CONDUIT OR TRUNKING	STANDARD PACKING	RATE PER COIL
4.00	56/0.30	1C4F200	26	4	15900
6.00	84/0.30	1C6F200	31	3	24310

HSN CODE : 85.44.60.20

Colour available: Green | Red | Blue | Black | Yellow

homecab-FRTM

Flame Retardant



Test	Specification	Specified Values
Critical Oxygen Index	ASTM-D 2863	Minimum 29%
Temperature Index	ASTM-D 2863	Minimum 250 °C



CAT 6 LAN CABLE

4 PAIR UNSHIELDED TWISTED PAIR (UTP)

KEI 4 pair Unshielded Twisted Pair (UTP) LAN Cables

SIZE	ITEM CODE	305 Mtr. Packing	Packing Type
CAT-6, 4 pair UTP LAN	4P0.55YYLN	14150	Spool



TELEPHONE SWITCH BOARD CABLE-FR

2 PAIR X 0.4 MM HDPE INSULATED PVC SHEATHED CABLE



KEI Solid high conductivity copper telephone (switchboard) cables with high density polyethylene insulation, paired, polyester and sheathed with Grey coloured PVC compound telephone cables generally conforming to ITD specification.

SIZE	ITEM CODE	0.4 mm		0.5 mm		
		100 Mtr. Packing	Packing Type	ITEM CODE	100 Mtr. Packing	Packing Type
1 Pair	1P0.4PEYTEL	845	Pouch	1P0.5PEYTEL	1200	Pouch
2 Pair	2P0.4PEYTEL	1490	Box	2P0.5PEYTEL	2120	Pouch
3 Pair	3P0.4PEYTEL	2200	Pouch	3P0.5PEYTEL	3145	Pouch
4 Pair	4P0.4PEYTEL	2825	Pouch	4P0.5PEYTEL	4135	Pouch
5 Pair	5P0.4PEYTEL	3470	Pouch	5P0.5PEYTEL	5155	Pouch
10 Pair	10P0.4PEYTEL	6990	Pouch	10P0.5PEYTEL	10010	Pouch





CCTV CABLE (3+1)

RG 59 (COPPER) JELLY FILLED CO-AXIAL + 4 CORE X 0.5mm



KEI CCTV Cable

SIZE	ITEM CODE	100 Mtr. Packing	Packing Type
CCTV (3+1) with RG-59	3C.1C0.25PEABY.YCCTVRG59	4650	Pouch
CCTV (4+1) with RG-59	4C.1C0.25PEABY.YCCTVRG59	5095	Pouch
CCTV (3+1)	3C.1C0.25PECBY.YCCTV	3070	Box
CCTV (4+1)	4C.1C0.25PECBY.YCCTV	3445	Box



CO-AXIAL CABLE RG-6 COPPER

RG-6 COPPER JELLY FLOODED CO-AXIAL CABLE



KEI Polyethylene Foam insulation with laminated aluminum tape and Aluminium wire braid, Jelly filled Black PVC oversheathed Co Axial Cables.

SIZE	ITEM CODE	100 Mtr. Packing	Packing Type	305 Mtr. Packing	Packing Type
RG-59	1C0.8PECBYRG59F	2350	Pouch	7168	Spool
RG-6 CU	1C1.02PECBYRG6F	3275	Box	9989	Spool
RG-6 CCS	1C1.02SPEABYRG6F	2065	Box	6298	Spool
RG-11 CU	1C1.63PECBYRG11F	7470	Pouch	22784	Spool
RG-11 CCS	1C1.63SPEABYRG11F	4260	Pouch	12993	Spool



SOLAR CABLE

KEI Make, 1500 V DC. Flexible (Class 5) Circular Tinned Copper Conductor, Extruded XLPO Insulated, and Overall Extruded XLPO Outersheathed Cables Conforming to TUV Standard 2 Pfg 1169/08.2007 & BS EN 50618, IEC 62930 & IS 17293

SIZE (AREA SQ.MM)	STANDARD PACKING MTRS.	Current Carrying (Amps) Capacity @ Amb. 60 Deg. C. single cable in air	ITEM CODE TUV	TUV 2 Pfg 1169/08.2007 PV1-F"	ITEM CODE BSEN	"EN/BSEN 50618 H1Z2Z2-K, IEC 62930, IS 17293
1.50	1000	30	1C1.5ZZSOLAR	44.50	1C1.5ZZBSOLAR	50.50
2.50	1000	41	1C2.5ZZSOLAR	68.60	1C2.5ZZBSOLAR	74.50
4	1000	55	1C4ZZSOLAR	93.45	1C4ZZBSOLAR	100.50
6	1000	70	1C6ZZSOLAR	137.00	1C6ZZBSOLAR	143.90
10	1000	98	1C10ZZSOLAR	227.15	1C10ZZBSOLAR	237.75
16	1000	132	1C16ZZSOLAR	356.40	1C16ZZBSOLAR	372.50
25	1000	176	1C25ZZSOLAR	---	1C25ZZBSOLAR	614.00
35	1000	218	1C35ZZSOLAR	---	1C35ZZBSOLAR	847.70
50	1000	276	1C50ZZSOLAR	---	1C50ZZBSOLAR	1201.00
70	1000	347	1C70ZZSOLAR	---	1C70ZZBSOLAR	1660.00
95	1000	416	1C95ZZSOLAR	---	1C95ZZBSOLAR	2241.30
120	1000	488	1C120ZZSOLAR	---	1C120ZZBSOLAR	2816.00
150	500	566	1C150ZZSOLAR	---	1C150ZZBSOLAR	3512.30
185	500	644	1C185ZZSOLAR	---	1C185ZZBSOLAR	4340.40
240	500	775	1C240ZZSOLAR	---	1C240ZZBSOLAR	5612.50


HSN CODE : 85446090

FLAT CABLE

KEI FLEXIBLE PVC INSULATED MULTICORE FR PVC SHEATHED MULTISTRANDED CABLES WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-694:2010.

SIZE (IN SQ. MM)	ERP ITEM CODE	CONDUCTOR CONSTRUCTION	RATE PER 100MTR. COIL
1.50	3C1.5YYFLAT	30/0.25	11130
2.50	3C2.5YYFLAT	50/0.25	17200
4.00	3C4YYFLAT	56/0.3	25590
6.00	3C6YYFLAT	84/0.3	38080
10.00	3C10YYFLAT	80/0.4	64120
16.00	3C16YYFLAT	126/0.4	101370
25.00	3C25YYFLAT	196/0.4	152310
35.00	3C35YYFLAT	276/0.4	237320

HSN CODE : 85.44.60.20

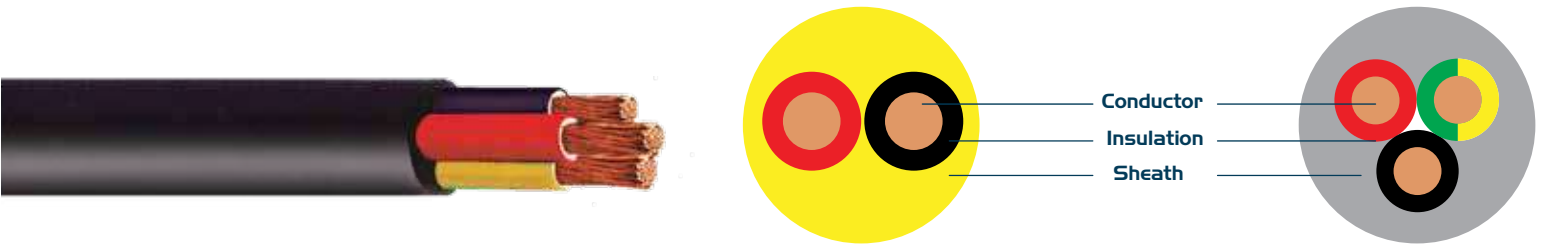

SINGLE CORE FLEX

KEI FLEXIBLE PVC INSULATED SINGLE CORE UNSHEATHED INDUSTRIAL MULTISTRAND CABLES FR / HRFR / FRLSH / HFFR (ZHFR) WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-694:2010/ IS 17048.

100 MTR	FR		HRFR		FRLSH		HFFR (ZHFR)	
SQ.MM	ERP ITEM CODE	RATE PER COIL	ERP ITEM CODE	RATE PER COIL	ERP ITEM CODE	RATE PER COIL	ERP ITEM CODE	RATE PER COIL
0.50	1C0.5YF100	1200	1C0.5YHF100	1280	1C0.5YLF100	1280	1C0.5ZLF100	1300
0.75	1C0.75YF100	1660	1C0.75YHF100	1780	1C0.75YLF100	1780	1C0.75ZLF100	1810
1.00	1C1YF100	2180	1C1YHF100	2330	1C1YLF100	2330	1C1ZLF100	2380
1.50	1C1.5YF100	3300	1C1.5YHF100	3480	1C1.5YLF100	3480	1C1.5ZLF100	3530
2.50	1C2.5YF100	5360	1C2.5YHF100	5630	1C2.5YLF100	5630	1C2.5ZLF100	5710
4	1C4YF100	7950	1C4YHF100	8310	1C4YLF100	8310	1C4ZLF100	8410
6	1C6YF100	12160	1C6YHF100	12650	1C6YLF100	12650	1C6ZLF100	12760
10	1C10YF100	21740	1C10YHF100	22450	1C10YLF100	22610	1C10ZLF100	22800
16	1C16YF100	34050	1C16YHF100	35140	1C16YLF100	35340	1C16ZLF100	35600
25	1C25YF100	53030	1C25YHF100	54680	1C25YLF100	54950	1C25ZLF100	55320
35	1C35YF100	74380	1C35YHF100	76590	1C35YLF100	76920	1C35ZLF100	77330
50	1C50YF100	106650	1C50YHF100	109820	1C50YLF100	110240	1C50ZLF100	110840
70	1C70YF100	150970	1C70YHF100	155320	1C70YLF100	155830	1C70ZLF100	156520
95	1C95YF100	199150	1C95YHF100	204890	1C95YLF100	205540	1C95ZLF100	206430
120	1C120YF100	254430	----	261640	1C120YLF100	262380	1C120ZLF100	263370
150	1C150YF100	318150	----	327190	1C150YLF100	328130	1C150ZLF100	329390
185	1C185YF100	385330	----	396290	1C185YLF100	397420	1C185ZLF100	398970
240	1C240YF100	510110	----	524640	1C240YLF100	526210	1C240ZLF100	528310
300	1C300YF100	635970	----	653820	1C300YLF100	655510	1C300ZLF100	657810
400	1C400YF100	850010	----	873680	1C400YLF100	875770	1C400ZLF100	878620

HSN CODE : 85.44.60.20

Colour available: Green | Red | Blue | Black | Yellow

MULTICORE FLEX

KEI FLEXIBLE PVC INSULATED MULTICORE FR PVC SHEATHED MULTISTRANDED CABLES WITH BRIGHT ANNEALED ELECTROLYTIC BARE COPPER CONDUCTOR FOR VOLTAGE GRADE UPTO 1100 V CONFORMING TO IS-694:2010.

2 CORE		FR		FRLSH		HFFR (ZHFR)	
SQ.MM	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	
0.50	2C0.5YYF100	3190	2C0.5YYLF100	3580	2C0.5YZF100	4050	
0.75	2C0.75YYF100	4400	2C0.75YYLF100	4740	2C0.75YZF100	5350	
1.00	2C1YYF100	5380	2C1YYLF100	5800	2C1YZF100	6450	
1.50	2C1.5YYF100	7340	2C1.5YYLF100	7990	2C1.5YZF100	8770	
2.50	2C2.5YYF100	11950	2C2.5YYLF100	13000	2C2.5YZF100	14140	
4.00	2C4YYF100	19210	2C4YYLF100	20700	2C4YZF100	22200	
6.00	2C6YYF100	28100	2C6YYLF100	30090	2C6YZF100	31970	
10.00	2C10YYF100	47290	2C10YYLF100	50320	2C10YZF100	53070	
16.00	2C16YYF100	73140	2C16YYLF100	77390	2C16YZF100	81020	

3 CORE		FR		FRLSH		HFFR (ZHFR)	
SQ.MM	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	
0.50	3C0.5YYF100	4580	3C0.5YYLF100	4890	3C0.5YZF100	5220	
0.75	3C0.75YYF100	5910	3C0.75YYLF100	6460	3C0.75YZF100	7060	
1.00	3C1YYF100	7460	3C1YYLF100	8010	3C1YZF100	8660	
1.50	3C1.5YYF100	10480	3C1.5YYLF100	11220	3C1.5YZF100	11960	
2.50	3C2.5YYF100	17160	3C2.5YYLF100	18330	3C2.5YZF100	19440	
4.00	3C4YYF100	27740	3C4YYLF100	29410	3C4YZF100	30850	
6.00	3C6YYF100	40860	3C6YYLF100	43080	3C6YZF100	44910	
10.00	3C10YYF100	68970	3C10YYLF100	72440	3C10YZF100	75060	
16.00	3C16YYF100	107070	3C16YYLF100	112030	3C16YZF100	115460	
25.00	3C25YYF100	162950	3C25YYLF100	170330	3C25YZF100	175760	
35.00	3C35YYF100	227890	3C35YYLF100	237890	3C35YZF100	244930	
50.00	3C50YYF100	326040	3C50YYLF100	339990	3C50YZF100	349540	
70.00	3C70YYF100	460570	3C70YYLF100	475080	3C70YZF100	492380	

4 CORE		FR		FRLSH		HFFR (ZHFR)	
SQ.MM	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	
0.50	4C0.5YYF100	5680	4C0.5YYF100	5960	4C0.5YZF100	6560	
0.75	4C0.75YYF100	7690	4C0.75YYF100	8330	4C0.75YZF100	9000	
1.00	4C1YYF100	9740	4C1YYF100	10410	4C1YZF100	11120	
1.50	4C1.5YYF100	13720	4C1.5YYF100	14620	4C1.5YZF100	15430	
2.50	4C2.5YYF100	22540	4C2.5YYF100	23940	4C2.5YZF100	25150	
4.00	4C4YYF100	36580	4C4YYF100	38550	4C4YZF100	40170	
6.00	4C6YYF100	54060	4C6YYF100	56840	4C6YZF100	58970	
10.00	4C10YYF100	91370	4C10YYF100	95680	4C10YZF100	98700	
16.00	4C16YYF100	141940	4C16YYF100	148140	4C16YZF100	152110	
25.00	4C25YYF100	216780	4C25YYF100	226370	4C25YZF100	233210	
35.00	4C35YYF100	303240	4C35YYF100	316250	4C35YZF100	325190	
50.00	4C50YYF100	433960	4C50YYF100	452140	4C50YZF100	464270	
70.00	4C70YYF100	613160	4C70YYF100	638210	4C70YZF100	654330	
95.00	4C95YYF100	810450	4C95YYF100	844200	4C95YZF100	866520	

5 CORE		FR		FRLSH		HFFR (ZHFR)	
SQ.MM	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	
0.50	5C0.5YYF100	7590	5C0.5YYLF100	8170	5C0.5YZF100	8630	
0.75	5C0.75YYF100	10480	5C0.75YYLF100	11350	5C0.75YZF100	11780	
1.00	5C1YYF100	12450	5C1YYLF100	13300	5C1YZF100	14220	
1.50	5C1.5YYF100	17450	5C1.5YYLF100	18820	5C1.5YZF100	19960	
2.50	5C2.5YYF100	28280	5C2.5YYLF100	30230	5C2.5YZF100	31670	
4.00	5C4YYF100	46100	5C4YYLF100	48100	5C4YZF100	50050	
6.00	5C6YYF100	67610	5C6YYLF100	71090	5C6YZF100	73770	
10.00	5C10YYF100	114680	5C10YYLF100	120240	5C10YZF100	124270	

6 CORE		FR		FRLSH		HFFR (ZHFR)	
SQ.MM	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	
0.50	6C0.5YYF100	8680	6C0.5YYLF100	9210	6C0.5YZF100	10220	
0.75	6C0.75YYF100	11710	6C0.75YYLF100	12760	6C0.75YZF100	13880	
1.00	6C1YYF100	15000	6C1YYLF100	16190	6C1YZF100	17420	
1.50	6C1.5YYF100	20970	6C1.5YYLF100	22660	6C1.5YZF100	24050	
2.50	6C2.5YYF100	34010	6C2.5YYLF100	36390	6C2.5YZF100	38180	
4.00	6C4YYF100	55420	6C4YYLF100	57890	6C4YZF100	60310	

7 CORE

SQ.MM	FR		FRLSH		HFFR (ZHFR)	
	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR
0.50	7C0.5YYF100	9790	7C0.5YYLF100	10230	7C0.5YZF100	11140
0.75	7C0.75YYF100	13290	7C0.75YYLF100	14290	7C0.75YZF100	15300
1.00	7C1YYF100	16910	7C1YYLF100	18240	7C1YZF100	19330
1.50	7C1.5YYF100	23980	7C1.5YYLF100	25670	7C1.5YZF100	26900
2.50	7C2.5YYF100	38990	7C2.5YYLF100	41410	7C2.5YZF100	42950
4.00	7C4YYF100	63700	7C4YYLF100	66040	7C4YZF100	68130

10 CORE

SQ.MM	FR		FRLSH		HFFR (ZHFR)	
	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR
0.50	10C0.5YYF100	14780	10C0.5YYLF100	15940	10C0.5YZF100	16940
0.75	10C0.75YYF100	20010	10C0.75YYLF100	21230	10C0.75YZF100	23060
1.00	10C1YYF100	25160	10C1YYLF100	26980	10C1YZF100	29020
1.50	10C1.5YYF100	34990	10C1.5YYLF100	37790	10C1.5YZF100	40130
2.50	10C2.5YYF100	56770	10C2.5YYLF100	60790	10C2.5YZF100	63830
4.00	10C4YYF100	92510	10C4YYLF100	96680	10C4YZF100	100820

12 CORE

SQ.MM	FR		FRLSH		HFFR (ZHFR)	
	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR
0.50	12C0.5YYF100	17080	12C0.5YYLF100	17980	12C0.5YZF100	19800
0.75	12C0.75YYF100	23100	12C0.75YYLF100	25030	12C0.75YZF100	27040
1.00	12C1YYF100	29650	12C1YYLF100	31860	12C1YZF100	34050
1.50	12C1.5YYF100	41580	12C1.5YYLF100	44720	12C1.5YZF100	47230
2.50	12C2.5YYF100	67530	12C2.5YYLF100	72040	12C2.5YZF100	75230
4.00	12C4YYF100	110120	12C4YYLF100	114640	12C4YZF100	118930

14 CORE

SQ.MM	FR		FRLSH		HFFR (ZHFR)	
	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR
0.50	14C0.5YYF100	19760	14C0.5YYLF100	20730	14C0.5YZF100	22720
0.75	14C0.75YYF100	26780	14C0.75YYLF100	28920	14C0.75YZF100	31130
1.00	14C1YYF100	34400	14C1YYLF100	36850	14C1YZF100	39260
1.50	14C1.5YYF100	48260	14C1.5YYLF100	51790	14C1.5YZF100	54530
2.50	14C2.5YYF100	78480	14C2.5YYLF100	83540	14C2.5YZF100	87000
4.00	14C4YYF100	127980	14C4YYLF100	132990	14C4YZF100	137620

16 CORE		FR		FRLSH		HFFR (ZHFR)	
SQ.MM	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	
0.50	16C0.5YYF100	22380	16C0.5YYLF100	23400	16C0.5YZF100	25510	
0.75	16C0.75YYF100	30400	16C0.75YYLF100	32720	16C0.75YZF100	35080	
1.00	16C1YYF100	39090	16C1YYLF100	41800	16C1YZF100	44370	
1.50	16C1.5YYF100	54920	16C1.5YYLF100	58830	16C1.5YZF100	61770	
2.50	16C2.5YYF100	89380	16C2.5YYLF100	95030	16C2.5YZF100	98780	
4.00	16C4YYF100	145910	16C4YYLF100	151450	16C4YZF100	156460	

19 CORE		FR		FRLSH		HFFR (ZHFR)	
SQ.MM	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	
0.50	19C0.5YYF100	26130	19C0.5YYLF100	27140	19C0.5YZF100	29360	
0.75	19C0.75YYF100	35640	19C0.75YYLF100	38160	19C0.75YZF100	40590	
1.00	19C1YYF100	45460	19C1YYLF100	48840	19C1YZF100	51510	
1.50	19C1.5YYF100	64650	19C1.5YYLF100	68970	19C1.5YZF100	72010	
2.50	19C2.5YYF100	105390	19C2.5YYLF100	111680	19C2.5YZF100	115550	
4.00	19C4YYF100	172450	19C4YYLF100	178610	19C4YZF100	183960	

24 CORE		FR		FRLSH		HFFR (ZHFR)	
SQ.MM	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	ERP ITEM CODE	RATE PER 100 MTR	
0.50	24C0.5YYF100	33350	24C0.5YYLF100	34790	24C0.5YZF100	37840	
0.75	24C0.75YYF100	45420	24C0.75YYLF100	48830	24C0.75YZF100	52240	
1.00	24C1YYF100	57930	24C1YYLF100	62480	24C1YZF100	66230	
1.50	24C1.5YYF100	82320	24C1.5YYLF100	88140	24C1.5YZF100	92480	
2.50	24C2.5YYF100	134170	24C2.5YYLF100	142710	24C2.5YZF100	148380	
4.00	24C4YYF100	219460	24C4YYLF100	228090	24C4YZF100	236080	

KEI[®]

Wires & Cables

BRIDGING THE GAP ACROSS 60 DIFFERENT COUNTRIES



THE POWER BEHIND THE POWER



Scan to reach other offices

Download KEI CONNECT
APP From



Scan to reach KEI Connect

AB Pal Electricals (P) Limited

Regd. Office: 1826, Bhagirath Palace, Chandni Chowk, Delhi-110006, India
Tel.: +91-11-43-111-333, 2386-5954, 3622, 4081, 8081, **Mob.:** +91-98914-98555
E-Mail: contact@abpal.com, **Website:** www.abpal.com

KEI Industries Limited

REGISTERED AND CORPORATE OFFICE:

D-90, OKHLA INDUSTRIAL AREA PHASE-I, NEW DELHI-110020, TEL: +91-11-26818840/8642/0242 FAX: 26817225, 26811959
E-MAIL: info@kei-ind.com WEBSITE: www.kei-ind.com Toll Free no: 1800 410 0000 CIN NO: L74899DL1992PLC051527

